

Long Life Span with Titan Boron Alloy

■ Features

- Compact and light
- The switch is installed on the back or side of the main body.
- Both right-handed and left-handed can be used.
- Only one switch for start and stop.
- Alumite coating for high durability anti-rusting




RN-2012



RN-2012H

■ Performance Curve

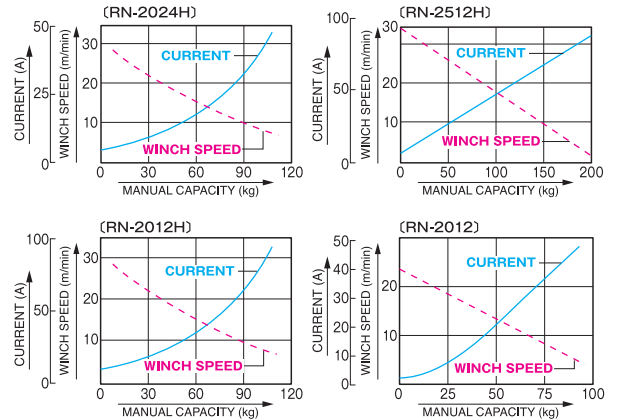

■ Specification

| Model | RN-2012 | RN-2012H | RN-2024H | RN-2512H |
|-----------------------|--|--------------------|--------------------|-----------------------|
| Voltage | DC 12 V | | DC 24 V | DC 12 V |
| Rated Current | 15 A | 24 A | 13 A | 30 A |
| Motor Output | 140 W | 200 W | | 250 W |
| Rating | 1 h / 15 A | 1 h / 24 A | 1 h / 13 A | 1 h / 30 A |
| Roller Revolution | 100 rpm (No Load) | | | 120 rpm (No Load) |
| Manual Capacity | Max. | 50 kg (45A) | 120 kg (85A) | 120 kg (40A) |
| | Rating | 35 kg (15A) | 50 kg (24A) | 50 kg (130A) |
| Winch Speed | 27 m/min (88 ft/min) | | | 32 m/min (105 ft/min) |
| Breaker | 15 A | 30 A | 20 A | 30 A |
| Standard Accessories | 1 Waterproofing Plate, 1 Vertical Type Main Body Packing, 5 Machine Screws M5×20 | | | |
| Net Weight | 11.5 kg (25.3 lbs) | 16.2 kg (35.7 lbs) | 16.9 kg (37.2 lbs) | |
| Gross Weight | 12.5 kg (27.5 lbs) | 17.3 kg (38.1 lbs) | 18.0 kg (39.6 lbs) | |
| Dimensions LxWxH (mm) | 425 × 260 × 285 | 445 × 270 × 290 | — | |
| Packing Unit | 1 | | | |

*Set the anchor and rope weight less than half as a manual capacity.

For pulling up the anchors of leisure and motor boats

■ Features

- Easy to pull up the anchor with a single switch
- Right-handed, left-handed free installation
- Easy to use. Just need to wire to the battery.
- High anti-discoloration with denatured epoxy paint




RES-2012H



RED-2012H

■ Performance Curve

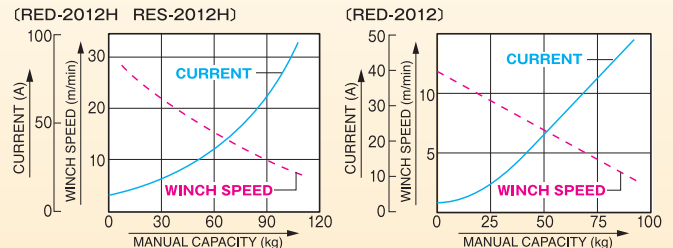

■ Specification

| Model | RED-2012H | RES-2012H | RED-2012 |
|-----------------------|--|------------------------|---------------|
| Voltage | DC 12 V | | |
| Rated Current | 24 A | 15 A | |
| Motor Output | 200 W | 140 W | |
| Rating | 1 h / 24 A | 1 h / 15 A | |
| Roller Revolution | 100 rpm (No Load) | 50 rpm (No Load) | |
| Manual Capacity | Max. | 120 kg (85 A) | 100 kg (45 A) |
| | Rating | 50 kg (24 A) | 40 kg (15 A) |
| Winch Speed | 27 m/min (88 ft/min) | 11.5 m/min (37 ft/min) | |
| Breaker | 30 A | 15 A | |
| Standard Accessories | 1 Waterproofing Plate, 1 Vertical Type Main Body Packing, 5 Machine Screws M5×20 | | |
| Net Weight | 13.5 kg (29.7 lbs) | — | |
| Gross Weight | 14.0 kg (30.8 lbs) | 8.5 kg (18.7 lbs) | |
| Dimensions LxWxH (mm) | 440 × 235 × 280 | 349 × 235 × 275 | |
| Packing Unit | 1 | | |

*Set the anchor and rope weight less than half as a manual capacity.