

Grinder Pumps

- For sewage including small pieces of fabrics and organic waste etc.
- With high chrome grinder ring and impeller, objects can be ground and discharged without clogging
- Rust-resistant stainless body
- Impeller and pump housing are made from durable ductile cast iron



Check here for more information



Without sleeve With sleeve




Grinder ring and impeller

PKG-750

SPECIFICATIONS

MODEL		PKG-750	PKG-1200	PKG-1500
PUMP	Connection dia	mm 32	32	32
		inch 1 1/4	1 1/4	1 1/4
	Total head	m 13	18	20.5
		ft 42.5	59.0	67.0
	Discharge volume	L/min 175	180	180
		GPH 2770	2850	2850
MOTOR	Voltage	V 220	220	220
	Frequency	Hz 50	50	50
	Rated current	A 6.8	9.9	12.0
	Output	W 750	1200	1500
	Consumption	W 1400	1600	2000
Applicable liquids	Consistency	Sandy and muddy water (suspended solids) *1		
	Suspended solid percentage	10% *2		
	Max. solids size	mm 3	3	3
inch 0.1		0.1	0.1	
Net weight (without cable)	kg 27.0	29.0	34.5	
	lbs 59.5	63.9	76	
Standard accessories *3		Hose coupling		

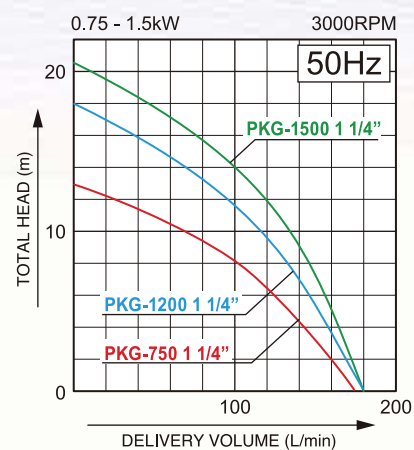

*1 Sandy and muddy water (suspended solids) are defined as debris "floating" within the water.

*2 If the suspended solid percentage is higher, premature wear and failure will occur.

To properly pump water with any debris, any solids must be in a suspension.

*3 Accessories may differ depending on model.