


这个文件只用于内容确认，不能用于印刷。
印刷是请一定使用AI文件。
このデータは内容確認用であり、印刷に使用するデータではありません。
印刷は必ずAIデータを使用してください。
This data is for sure the contents, not the data be used for printing.
When you make a print, please use the AI data always.

PERFORMANCE CURVE

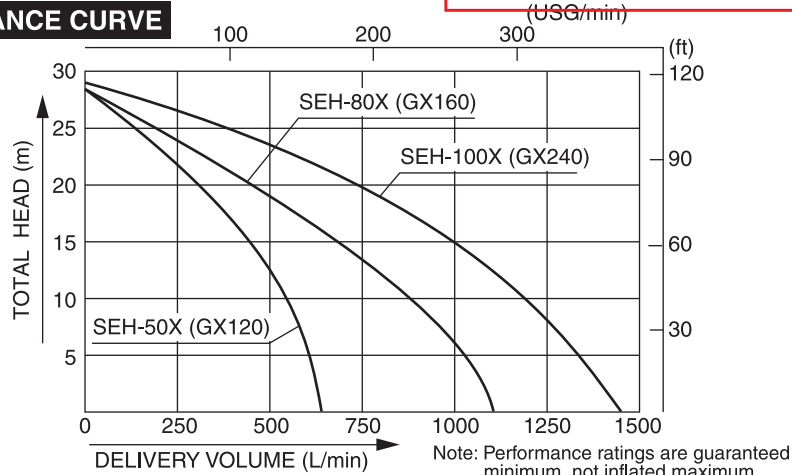

SPECIFICATIONS

Model				SEH-50X	SEH-80X	SEH-100X
PUMP	Connection Dia			50 mm (2")	80 mm (3")	100 mm (4")
	Connection Thread			Parallel Pipe Thread		Parallel Pipe Thread Fire Hose Coupling Screw
	Total Head	typeA	FC	27 m (88 ft)	27 m (88 ft)	28 m (92 ft)
		typeB	ADC	30 m (98 ft)		
	Delivery Volume	typeA	FC	640 L/min (169 USG/min)	1100 L/min (290 USG/min)	1450 Lmin (383 USG/min)
		typeB	ADC	600 L/min (158 USG/min)		
Max. Suction Head				8 m (26 ft)		
ENGINE	Model			HONDA GX120	HONDA GX160	HONDA GX240
				Forced Air-cooled 4-stroke Gasoline Engine		
	Exhaust Volume			122 cc	163 cc	270 cc
	Output	Rated Power		2.1 kW (2.9 PS)/3600 rpm	2.9 kW (3.9 PS)/3600 rpm	4.6 kW (6.3 PS)/3600 rpm
		Max. Power		2.4 kW (3.3 PS)/3600 rpm	3.6 kW (4.9 PS)/3600 rpm	5.9 kW (8.0 PS)/3600 rpm
	Fuel			Automotive Unleaded Gasoline		
	Fuel Tank Capacity			2.0 L (0.53 USG)	3.1 L (0.82 USG)	5.3 L(1.40 USG)
	Continuous Operating Time			2 hrs		2.5 hrs
	Starting Method			Recoil Starter		
Standard Accessories			1 Strainer, 2 Hose Couplings, 3 Hose Bands, 1 Engine Tool Set			
Net Weight			21 kg	28 kg	54kg	

For the purpose of improvement, specifications are subject to changes without notice.