

Clear Water Pump

Gasoline Engine

Powered by KOSHIN



SEV-50E




SEV-80E

Outstanding Features

- Powerful Engine
- 8m Suction Lift
- Easy to Carry with Compact and Light-weight Body

Model		SEV-50E	SEV-80E
Category		Self-priming, Centrifugal pump	
PUMP	Connection Suction	50 mm (2")	80 mm (3")
	Dia Discharge	50 mm (2")	80 mm (3")
	Connection Thread	Outer Pipe Thread BSP	
	Total Head	27 m (88 ft)	
Discharge Volume		670 L/min (177 USG/min)	1100 L/min (290 USG/min)
Max. Suction Lift		8 m (26 ft)	
ENGINE	Type	Forced Air-cooled 4-stroke Gasoline Engine	
	Model	Koshin K210S	
	Displacement	209cc	
	Rated Output	3.7 kW (5.0 PS) / 3600 rpm	
	Max. Output	4.3 kW (5.8 PS) / 3600 rpm	
	Fuel	Automotive Unleaded Gasoline	
	Fuel Tank Capacity	Tank size: 3.3 L (0.87 USG), Usage level: 2.6 L (0.68 USG)	
	Engine Oil	4-stroke engine oil: SAE 15W-40	
	Engine Oil Capacity	0.5 L (0.13 USG)	
	Continuous Operating Time	Approx. 1.4 hrs	Approx. 1.3 hrs
Starting Method		Recoil Starter	
Applicable Liquids	Consistency	Clear water	
	Suspended Solid Percentage	-	
	Max. Solids Size	-	
	Temperature	5°C - 40°C	
Standard Accessories		1 Strainer, 2 Coupling set, 3 Hose bands, 1 Engine Tool	
Net Weight		21.9 kg (48.3 lbs)	24.6 kg (54.2 lbs)
Gross Weight		23.9 kg (52.7 lbs)	27.0 kg (59.5 lbs)
Product Dimensions LxWxH (mm)		489 × 390 × 391	528 × 410 × 413
Packing Dimensions LxWxH (mm)		504 × 405 × 411	543 × 425 × 425

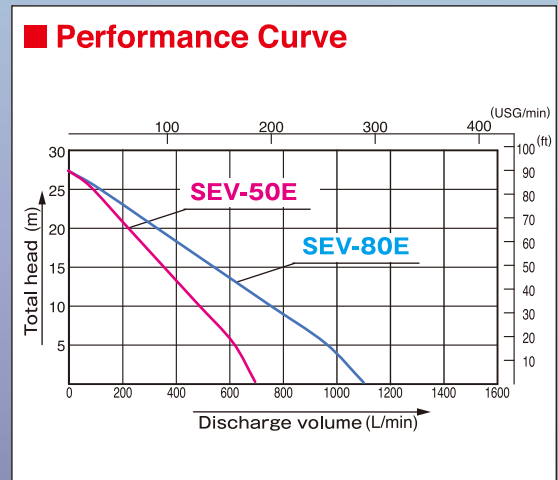

KOSHIN LTD.

12 Kami-Hachinotsubo, Kotari,
Nagaokakyo city, Kyoto, 617-8511, Japan

✉ Info@koshin-ltd.co.jp www.koshinpump.com

📘 facebook @koshinpump 📺 YouTube

